



MDRIVE[®] 14

MOTOR+DRIVER

Plus

MOTION CONTROL
 (with optional CANopen)

STANDARD FEATURES

- Highly Integrated Microstepping Driver, Intelligent Motion Controller and NEMA 14 High Torque 1.8° Brushless Step Motor
- Advanced 2nd Generation Current Control for Exceptional Performance and Smoothness
- Single Supply: +12 to +48 VDC
- Cost Effective
- Extremely Compact
- Available Options:
 - Long Life Linear Actuators**
 - Internal Magnetic Encoder for Closed Loop Control
 - Integrated Planetary Gearbox
 - Control Knob for Manual Positioning
- 2 Rotary Motor Lengths Available
- Auxiliary Logic Power Supply Input
- 20 Microstep Resolutions up to 51,200 Steps Per Rev Including: Degrees, Metric, Arc Minutes
- Open or Optional Closed Loop Control
- Programmable Motor Run and Hold Currents
- Four +5 to +24 VDC I/O Lines Accept Sourcing or Sinking Outputs
- One 10 Bit Analog Input Selectable: 0 to +10VDC, 0 to +5VDC, 0-20mA, 4-20mA
- 0 to 5MHz Step Clock Rate Selectable in 0.59Hz Increments
- RS-422/485 Communications
- 62 Software Addresses for Multi-Drop Communications
- Simple 1 to 2 Character Instructions
- Pluggable Locking Wire Crimp Interface

EXPANDED PLUS² FEATURES

- +24 VDC Tolerant I/O Lines Sourcing or Sinking, Inputs and Outputs:
 - 8 I/O Lines with Electronic Gearing (or)
 - 4 I/O Lines with External/Remote Encoder for Closed Loop Control
- High Speed Position Capture Input or Trip Output
- Pluggable Locking Wire Crimp Interface
- Optional CANopen Communication

DESCRIPTION

The **MDrive[®]14Plus Motion Control** offers system designers a cost effective, full featured programmable motion controller integrated with a NEMA 14 high torque 1.8° brushless step motor and a +12 to +48 volt microstepping driver.

The unsurpassed smoothness and performance delivered by the MDrive14Plus Motion Control are achieved through IMS's advanced 2nd generation current control. By applying innovative techniques to control current flow through the motor, resonance is significantly dampened over the entire speed range and audible noise is reduced.

The MDrive14Plus accepts a broad input voltage range from +12 to +48 VDC, delivering enhanced performance and speed. Oversized input capacitors are used to minimize power line surges, reducing problems that can occur with long cable runs and multiple drive systems. An extended operating range of -40° to +85°C provides long life, trouble free service in demanding environments.

Standard features of all MDrive14Plus Motion Control include four +5 to +24 volt general purpose I/O lines, one 10 bit analog input, 0 to 5MHz step clock rate, 20 microstep resolutions up to 51,200 steps per revolution, and full featured easy-to-program instruction set.

Expanded features of MDrive14Plus² versions include up to eight +5 to +24 volt general purpose I/O lines and the capability of electronic gearing by following a rotary or linear axis at an electronically controlled ratio, or an output clock can be generated fixed to the internal step clock.

All MDrive14Plus Motion Control are available with optional closed loop control. This increases functionality by add-

ing stall detection, position maintenance and find index mark.

The closed loop configuration is added via a 512 line (2048 edge) magnetic encoder with index mark, internal to the unit so there is no increase in length. Or, for an expanded choice of line counts and resolutions with MDrive14Plus² versions only, closed loop control is available with an interface to a remotely mounted user-supplied external encoder.

The MDrive communicates over RS-422/485 which allows for point-to-point or multiple unit configurations utilizing one communication port. Addressing and hardware support up to 62 uniquely addressed units communicating over a single line. Baud rate is selectable from 4.8 to 115.2kbps.

Optional communication protocols include CANopen. The CAN bus is 2.0B active (11 and/or 29 bit) and is capable of all standard frequencies from 10kHz to 1MHz. CANopen features include node guarding, heartbeat producer, SDOs and PDOs. Highlights include variable PDO mapping and extended node identifier.

Motor configurations include a single shaft rotary in two lengths, and linear actuators with long life Acme screw**. Interface connections are accomplished using locking wire crimp connectors.

MDrivePlus connectivity has never been easier with options ranging from **all-inclusive QuickStart Kits to individual interfacing cables and mating connector kits** to build your own cables. See pg 4.

The MDrive14Plus is a compact, powerful and cost effective motion control solution that will reduce system cost, design and assembly time for a large range of brushless step motor applications.

**Consult Factory for Availability.

MDrive14Plus MOTION CONTROL

STANDARD SPECIFICATIONS (Plus Versions)

INPUT VOLTAGE (+V)	Range	+12 to +48 VDC <i>Power supply current requirements = 1A (maximum) per MDrive14Plus. Actual power supply current will depend on voltage and load.</i>		
	AUX. LOGIC INPUT VOLTAGE	Range	+12 to +24 VDC Maintains power to control and feedback circuits (only) when input voltage is removed.	
ANALOG INPUT	Resolution	10 Bit		
	Voltage Range	0 to +5 VDC, 0 to +10 VDC, 0-20 mA, 4-20 mA		
GENERAL PURPOSE I/O	Number/Type	4 Sinking Outputs/4 Sourcing or Sinking Inputs		
	Logic Range	Inputs and Outputs Tolerant to +24VDC, Inputs TTL Level Compatible		
	Output Sink Current	Up to 600 mA per Channel		
COMMUNICATION	Type (Standard)	RS-422/485		
	Baud Rate	4.8 to 115.2kbps		
MOTION	Open Loop Configuration	Number of Settings	20	
		Steps Per Revolution	200, 400, 800, 1000, 1600, 2000, 3200, 5000, 6400, 10000, 12800, 20000, 25000, 25600, 40000, 50000, 51200, 36000 (0.01 deg/μstep), 21600 (1 arc minute/μstep), 25400 (0.001mm/μstep)	
	Closed Loop Configuration (Optional)	Internal Encoder	Type	Internal, Magnetic
			Steps Per Revolution	51200
	Counters		Type	Position, Encoder/32 Bit
			Edge Rate (Max)	5 MHz
	Velocity		Range	+/- 5,000,000 Steps Per Second
			Resolution	0.5961 Steps Per Second
Accel/Decel		Range	1.5 x 10 ⁹ Steps Per Second ²	
		Resolution	90.9 Steps Per Second ²	
SOFTWARE	Program Storage	Type/Size	Flash/6384 Bytes	
	User Registers	(4) 32 Bit		
	User Program Labels and Variables	192		
	Math Functions	+, -, x, ÷, >, <, =, <=, >=, AND, OR, XOR, NOT		
	Branch Functions	Branch & Call		
	General Purpose I/O Functions	Inputs	Home, Limit Plus, Limit Minus, Go, Stop, Pause, Jog Plus, Jog Minus, General Purpose	
		Outputs	Moving, Fault, Stall, Velocity Change, General Purpose	
	Trip Functions	Trip on Input, Trip on Position, Trip on Time, Trip Capture, Trip on Relative Position		
	Party Mode Addresses	62		
	Encoder Functions	Stall Detection, Position Maintenance, Find Index		
THERMAL	Operating Temperature	Heat Sink	-40° to +85°C (non-condensing)	
		Motor	-40° to +100°C (non-condensing)	

EXPANDED SPECIFICATIONS (Plus² Versions)

GENERAL PURPOSE I/O	Number/Type	8 Sourcing or Sinking Outputs/Inputs (or 4 when Remote Encoder Option is Selected)			
	Logic Range	Sourcing Outputs +12 to +24 VDC, Inputs and Sinking Outputs Tolerant to +24 VDC, Inputs TTL Level Compatible			
	Output Sink/Source Current	Up to 600 mA per Channel			
COMMUNICATION	Type (Optional)	CANopen DSP-402 (V2.0), DS-301 (V3.0), 2.0B Active			
	ID	11 and/or 29 Bit			
	Isolation	Galvanic			
MOTION	Electronic Gearing	Features		Node Guarding, Heartbeat, SDOs, PDOs (Variable Mapping)	
		Range [‡] /Resolution/Threshold (External Clock In)	0.001 to 2.000/32 Bit/TTL		
			Input Filter Range	50 nS to 12.9 μS (10 MHz to 38.8 kHz)	
	High Speed I/O	Range [‡] (Secondary Clock Out)		1 to 1	
		Position Capture	Input Filter Range	50 nS to 12.9 μS (10 MHz to 38.8 kHz)	
			Resolution	32 Bit	
	Closed Loop Configuration (Optional)	Remote Encoder	Trip Output – Speed/Resolution/Threshold		150 nS/32 Bit/TTL
			Type	User-Supplied Differential Encoder	
Steps Per Revolution			See "Standard Specs Open Loop Steps/Rev" Above		
		Resolution	User-Defined	Note: μstep/rev 2X the encoder count/rev minimum	


[‡] Adjusting the microstep resolution can increase the range.

MOTOR SPECIFICATIONS


	Holding Torque	Detent Torque	Rotor Inertia	Weight (Motor+Driver)
SINGLE LENGTH	18.0 oz-in / 12.71 N-cm	2.0 oz-in / 1.4 N-cm	0.000278 oz-in-sec ² / 0.0199 kg-cm ²	5.29 oz / 150.0 g
TRIPLE LENGTH	36.0 oz-in / 25.0 N-cm	4.4 oz-in / 3.1 N-cm	0.000801 oz-in-sec ² / 0.0566 kg-cm ²	12.8 oz / 380.0 g

MOTOR PERFORMANCE — Speed-Torque

Single Length Rotary Motor

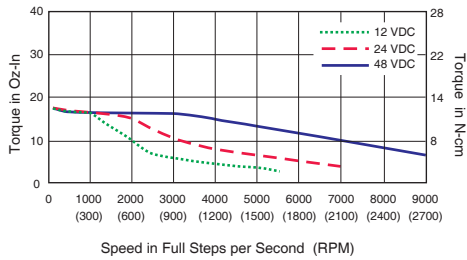


Triple Length Rotary Motor

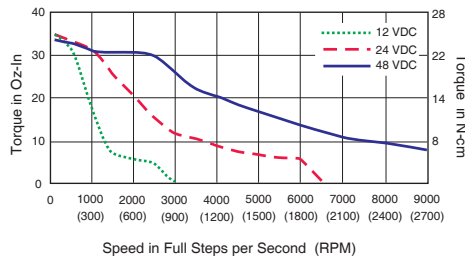


MECHANICAL SPECIFICATIONS

Dimensions in Inches (mm)

MDrive14Plus Motion Control

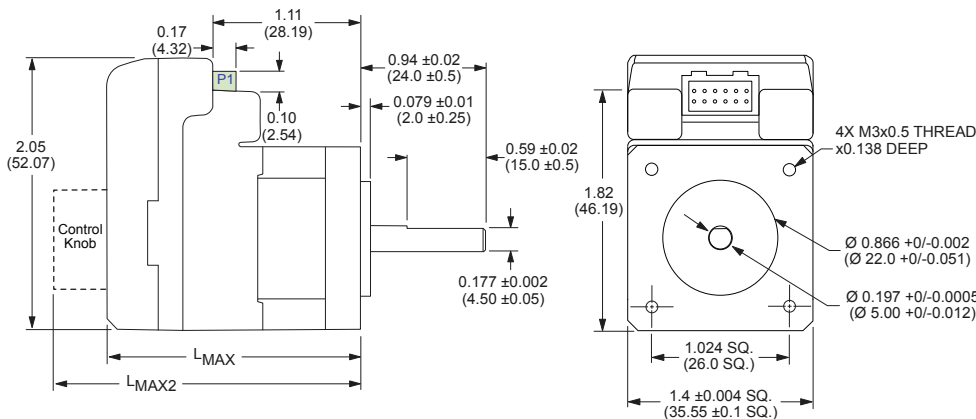


MDrive14Plus² Motion Control

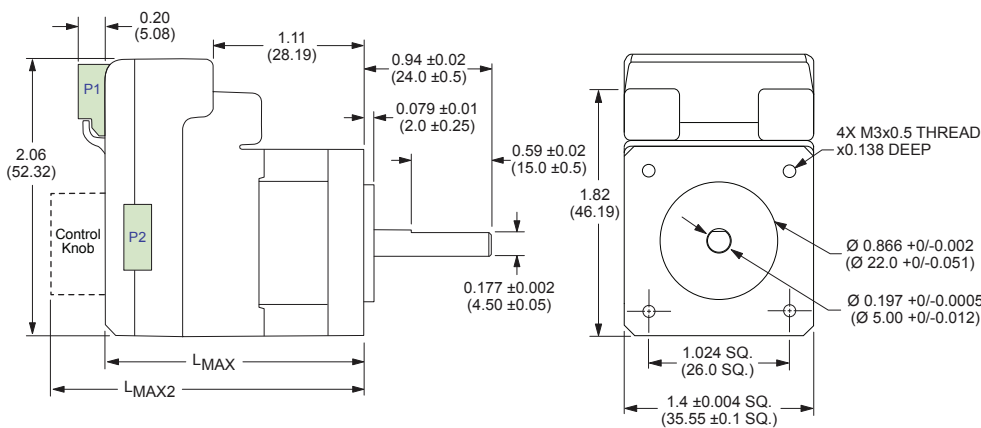


MDrive Lengths Inches (mm)

Motor Length	LMAX SINGLE SHAFT, INTERNAL ENCODER, or LINEAR ACTUATOR	LMAX2 CONTROL KNOB
Single	1.93 (49.02)	2.62 (66.55)
Triple	3.03 (76.96)	3.73 (94.74)

LMAX2 Option



P2 Connector Options



PIN ASSIGNMENTS — MDrive14Plus Motion Control

Plus

P1: I/O, POWER & COMM CONNECTOR	
Wire Crimp	Function
Pin 1	Power/Aux/Comm Ground
Pin 2	+V (+12 to +48 VDC)
Pin 3	I/O 2
Pin 4	I/O 3
Pin 5	I/O 4
Pin 6	Analog Input
Pin 7	I/O 1
Pin 8	Aux-Logic (+12 to +24 VDC)
Pin 9	TX +
Pin 10	TX -
Pin 11	RX -
Pin 12	RX +

Plus²

P1: I/O & POWER CONNECTOR		
Wire Crimp	Function	
	Expanded I/O	Remote Encoder Closed Loop Control
Pin 1	I/O Power	I/O Power
Pin 2	I/O Ground	I/O Ground
Pin 3	I/O 1	I/O 1
Pin 4	I/O 2	I/O 2
Pin 5	I/O 3	I/O 3
Pin 6	I/O 4	I/O 4
Pin 7	I/O 9	Channel A +
Pin 8	I/O 10	Channel A -
Pin 9	I/O 11	Channel B +
Pin 10	I/O 12	Channel B -
Pin 11	Capture/Trip I/O	Capture/Trip I/O
Pin 12	Analog In	Analog In
Pin 13	Step/Clock I/O	Index +
Pin 14	Direction/Clock I/O	Index -
Pin 15	+V (+12 to +48 VDC)	+V (+12 to +48 VDC)
Pin 16	Power/Aux Ground	Power/Aux Ground

P2: COMM CONNECTOR

RS-422/485

Wire Crimp	Function
Pin 1	TX +
Pin 2	Comm Ground
Pin 3	RX -
Pin 4	TX -
Pin 5	Aux-Logic (+12 to +24 VDC)
Pin 6	RX +
Pin 7	RX +
Pin 8	RX -
Pin 9	TX +
Pin 10	TX -

CANopen

DB9 (Male)	Function
Pin 1	No Connect
Pin 2	CAN Low
Pin 3	CAN -V
Pin 4	Aux Power
Pin 5	Shield
Pin 6	CAN -V
Pin 7	CAN High
Pin 8	No Connect
Pin 9	CAN +V

ORDER INFORMATION — MDrive14Plus Motion Control

CONNECTIVITY

new QuickStart Kit
For rapid design verification, all-inclusive QuickStart Kits have communication converter, prototype development cable(s), instructions and CD for MDrivePlus initial functional setup and system testing.

new Communication Converters
Electrically isolated, in-line converters pre-wired with mating connectors to conveniently set/program communication parameters for a single MDrivePlus via a PC's USB port. Length 12.0' (3.6m).
Mates to connector:
12-Pin Wire CrimpMD-CC403-001
10-Pin Wire CrimpMD-CC402-001
DB9 CANopenMD-CC500-000*
*Requires mating connector adapter and power supply, not supplied.

Prototype Development Cables
Speed test/development with pre-wired mating connectors that have flying leads other end. Length 10.0' (3.0m).
Mates to connector:
12-Pin Wire CrimpPD12B-1434-FL3
10-Pin Wire CrimpPD10-1434-FL3
16-Pin Wire CrimpPD16-1417-FL3

new Mating Connector Kits
Use to build your own cables. Kit contains 5 mating shells with pins. Cable not supplied. Manufacturer's crimp tool recommended.
Mates to connector:
12-Pin Wire CrimpCK-08
10-Pin Wire CrimpCK-02
16-Pin Wire CrimpCK-10

OPTIONS

Linear Actuator**
The MDrive14Plus is offered with numerous linear actuator styles and options to satisfy a broad range of linear motion applications. Contact the factory for details or see: www.imshome.com/mdriveplus_linear_actuator.html

Internal Encoder
All MDrive14Plus Motion Control versions are available with an optional internal 512-line (2048 count) magnetic encoder with index mark.

Remote Encoder (Plus² versions only)
MDrive14Plus² Motion Control versions are available with differential encoder inputs for use with a remote encoder (not supplied).

Control Knob
The MDrive14Plus is available with a factory-mounted rear control knob for manual shaft positioning.

Planetary Gearbox
Efficient, low maintenance planetary gearboxes are offered assembled with the MDrive14Plus. Refer to details and part numbers on the back cover.

**Consult Factory for Availability.

Connectivity details: www.imshome.com/cables_cordsets.html

PART NUMBERING

Plus

K MDI1CRZ14 4 - OPTION
QuickStart Kit details above Motor
A = Single Length & Linear Actuator**
C = Triple Length

P1: I/O, Power & Communications
12-Pin Locking Wire Crimp

Example #1: Part Number **MDI1CRZ14A4** is an MDrive14Plus Motion Control with 12-pin pluggable locking wire crimp connector for I/O, power and communications interface and NEMA 14 single length motor.

Plus²

K MDI3C 14 4 - OPTION
QuickStart Kit details above Motor
A = Single Length & Linear Actuator**
C = Triple Length

P1: I/O & Power
16-Pin Locking Wire Crimp

P2: Communications
RL = RS-422/485 with 10-Pin Friction Lock Wire Crimp
CB = CANopen with DB9 Connector

Example #2: Part Number **MDI3CRL14A4** is an MDrive14Plus² Motion Control with 16-pin I/O & power interface, RS-422/485 communications with 10-pin locking wire crimp connector, and NEMA 14 single length motor.

**Consult Factory for Availability.

OPTIONS

Linear Actuator** **-L**
For complete product specifications, see: www.imshome.com/mdriveplus_linear_actuator.html

Internal Encoder **-EQ**
Example: **MDI1CRZ14A4-EQ** adds a 512-line internal magnetic encoder with index mark to example #1.

Remote Encoder **-EE**
Example: **MDI3CRL14A4-EE** adds differential encoder inputs for use with remote encoder (not supplied). Available with Plus² versions only. May not be combined with internal encoder option.

Control Knob **-N**
Example: **MDI3CRL14A4-N** adds a rear control knob for manual positioning to example #2.

Planetary Gearbox **-G [] [] [] -F**
Refer to gearbox page for complete table of ratios and part numbers. **Optional NEMA Flange**
Example: **MDI3CRL14A4-G1A2** adds a 1-stage planetary gearbox with 5.18:1 ratio to example #2. Add -F for optional NEMA flange.

MDrive14PLUS WITH PLANETARY GEARBOX

The MDrive14Plus is available with a Planetary Gearbox option developed to increase torque at lower speeds, enable better inertia matching and produce finer positional resolutions. These efficient, low maintenance Planetary Gearbox come fully assembled with the MDrive and are offered in a large number of reduction ratios in 1-, 2- and 3-stage configurations. An optional NEMA Output Flange allows mounting the Planetary Gearbox to the load using a standard NEMA bolt circle. Planetary Gearbox may be combined with other MDrive14Plus options, however are unavailable with Linear Actuators.

Planetary Gearbox Parameters

	Permitted Output Torque (oz-in/Nm)	Gearbox Efficiency	Maximum Backlash	Output Side with Ball Bearing			
				Maximum Load (lb-force/N)		Weight (oz/g)	
				Radial	Axial	Gearbox	with Flange
1-STAGE	106/0.75	0.80	1.5°	9.0/40	2.2/10	5.7/162	5.9/168
2-STAGE	318/2.25	0.75	2.0°	15.7/70	4.5/20	7.5/213	7.8/221
3-STAGE	637/4.50	0.70	2.5°	22.0/100	6.7/30	9.3/264	9.6/273


Ratios and Part Numbers

Planetary Gearbox	Ratio (Rounded)	Part Number**
1-Stage	3.71:1	G1A1
1-Stage	5.18:1	G1A2
1-Stage	6.75:1	G1A3
2-Stage	13.73:1	G1A4
2-Stage	15.88:1	G1A5
2-Stage	18.37:1	G1A6
2-Stage	19.20:1	G1A7
2-Stage	22.21:1	G1A8
2-Stage	25.01:1	G1A9
2-Stage	26.85:1	G1B1
2-Stage	28.93:1	G1B2
2-Stage	34.98:1	G1B3
2-Stage	45.56:1	G1B4
3-Stage	50.89:1	G1B5
3-Stage	58.86:1	G1B6
3-Stage	68.07:1	G1B7
3-Stage	71.16:1	G1B8
3-Stage	78.72:1	G1B9
3-Stage	92.70:1	G1C1
3-Stage	95.18:1	G1C2
3-Stage	99.51:1	G1C3
3-Stage	107.21:1	G1C4
3-Stage	115.08:1	G1C5
3-Stage	123.98:1	G1C6
3-Stage	129.62:1	G1C7
3-Stage	139.14:1	G1C8
3-Stage	149.90:1	G1C9
3-Stage	168.85:1	G1D1
3-Stage	181.25:1	G1D2
3-Stage	195.27:1	G1D3
3-Stage	236.10:1	G1D4
3-Stage	307.55:1	G1D5

Planetary Gearbox for MDrive14Plus

Dimensions in Inches (mm)

*Gearbox without Flange
†Gearbox with Flange

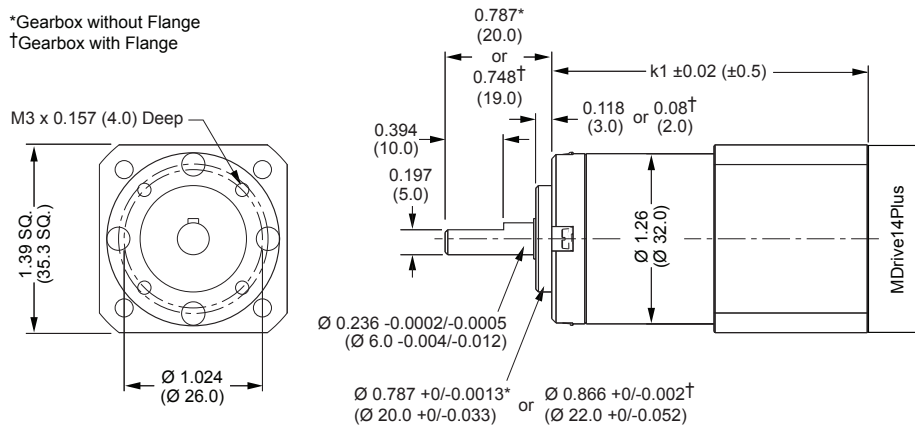

Gearbox Lengths Inches (mm)

	k1	
	GEARBOX*	with FLANGE†
1-Stage	1.969 (50.0)	2.008 (51.0)
2-Stage	2.343 (59.5)	2.382 (60.5)
3-Stage	2.717 (69.0)	2.756 (70.0)

**Include optional planetary gearbox by adding -G plus 3 characters to the end of an MDrive part number.

U.S.A. SALES OFFICES

Eastern Region
Tel. 862 208-9742 - Fax 973 661-1275
e-mail: jroake@imshome.com
Central Region
Tel. 260 402-6016 - Fax 419 858-0375
e-mail: dwaksman@imshome.com
Western Region
Tel. 602 578-7201
e-mail: dweisenberger@imshome.com

IMS ASIA PACIFIC OFFICE

30 Raffles Pl., 23-00 Chevron House, Singapore 048622
Tel. +65/6233/6846 - Fax +65/6233/5044
e-mail: wllee@imshome.com

IMS EUROPEAN SALES MANAGEMENT

4 Quai Des Etroits
69005 Lyon, France
Tel. +33/4 7256 5113 - Fax +33/4 7838 1537
e-mail: bmartinez@imshome.com

IMS UK Sales

Machine Technology Centre, Blackhill Drive
Wolverton, Milton Keynes MK12 5TS
Tel. +44/0 1908 628000 - Fax +44/0 1908 628001
e-mail: mcheckley@imshome.com

TECHNICAL SUPPORT

Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107
e-mail: etech@imshome.com

Intelligent Motion Systems, Inc.

370 North Main Street, P.O. Box 457
Marlborough, CT 06447 - U.S.A.
Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107
e-mail: info@imshome.com
http: //www.imshome.com