



# MDRIVE<sup>®</sup> 34

MOTOR+DRIVER

Plus

motion control  
(with optional CANopen)

## STANDARD FEATURES

- Highly Integrated Microstepping Driver, Intelligent Motion Controller and NEMA 34 High Torque 1.8° Brushless Step Motor
- Advanced 2nd Generation Current Control for Exceptional Performance and Smoothness
- Single Supply: +12 to +75 VDC
- Cost Effective
- Extremely Compact
- Available Options:
  - Long Life Linear Actuators\*\*
  - Internal Optical Encoder for Closed Loop Control
  - Integrated Planetary Gearbox
  - Control Knob for Manual Positioning
- Three Rotary Motor Lengths Available
- Auxiliary Logic Power Supply Input
- 20 Microstep Resolutions up to 51,200 Steps Per Rev Including: Degrees, Metric, Arc Minutes
- Open or Optional Closed Loop Control
- Programmable Motor Run and Hold Currents
- Four +5 to +24 VDC I/O Lines Accept Sourcing or Sinking Outputs
- One 10 Bit Analog Input Selectable: 0 to +10VDC, 0 to +5VDC, 0-20 mA, 4-20 mA
- 0 to 5MHz Step Clock Rate Selectable in 0.59Hz Increments
- RS-422/485 or Optional CANopen Communications
- 62 Software Addresses for Multi-Drop Communications
- Simple 1 to 2 Character Instructions
- Interface Options:
  - 12.0" (30.5cm) Flying Leads

## EXPANDED PLUS<sup>2</sup> FEATURES

- 8 I/O Lines, +24 VDC Tolerant Sourcing or Sinking, Inputs and Outputs
- Electronic Gearing
- High Speed Position Capture Input or Trip Output
- Pluggable Locking Wire Crimp Interface

## DESCRIPTION

The **MDrive<sup>®</sup>34Plus Motion Control** offers system designers a cost effective, full featured programmable motion controller integrated with a NEMA 34 high torque 1.8° brushless step motor and a +12 to +75 volt microstepping driver.

The unsurpassed smoothness and performance delivered by the MDrive34Plus Motion Control are achieved through IMS's advanced 2nd generation current control. By applying innovative techniques to control current flow through the motor, resonance is significantly dampened over the entire speed range and audible noise is reduced.

The MDrive34Plus accepts a broad input voltage range from +12 to +75 VDC, delivering enhanced performance and speed. Oversized input capacitors are used to minimize power line surges, reducing problems that can occur with long cable runs and multiple drive systems. An extended operating range of -40° to +75°C provides long life, trouble free service in demanding environments.

Standard features of all MDrive34Plus Motion Control include four +5 to +24 volt general purpose I/O lines, one 10 bit analog input, 0 to 5MHz step clock rate, 20 microstep resolutions up to 51,200 steps per revolution, and full featured easy-to-program instruction set.

Expanded features of MDrive34Plus<sup>2</sup> versions include up to eight +5 to +24 volt general purpose I/O lines and the capability of electronic gearing by following a rotary or linear axis at an electronically controlled ratio, or an output clock can be generated fixed to the internal step clock.

All MDrive34Plus Motion Control are available with optional closed loop control. This increases functionality by adding stall detection, position maintenance and find index mark.

The closed loop configuration is added via a 512 line (2048 edge) optical encoder with index mark, internal to the unit so there is no increase in length. Or, for an expanded choice of line counts and resolutions with MDrive34Plus<sup>2</sup> versions only, closed loop control is available with an interface to a remotely mounted user-supplied external encoder.

The MDrive communicates over RS-422/485 which allows for point-to-point or multiple unit configurations utilizing one communication port. Addressing and hardware support up to 62 uniquely addressed units communicating over a single line. Baud rate is selectable from 4.8 to 115.2kbps.

Optional communication protocols include CANopen. The CAN bus is 2.0B active (11 and/or 29 bit) and is capable of all standard frequencies from 10kHz to 1MHz. CANopen features include node guarding, heartbeat producer, SDOs and PDOs. Highlights include variable PDO mapping and extended node identifier.

Motor configurations include a single shaft rotary in three lengths, and linear actuators with long life Acme screw\*\*.

Interface connections are accomplished for standard MDrivePlus versions using 12.0" (30.5cm) flying leads, and for expanded MDrive34Plus<sup>2</sup> versions using pluggable locking wire crimp connectors.

MDrivePlus connectivity has never been easier with options ranging from **all-inclusive QuickStart Kits** to **individual interfacing cables** and **mating connector kits** to build your own cables. See pg 5.

The MDrive34Plus is a compact, powerful and cost effective motion control solution that will reduce system cost, design and assembly time for a large range of brushless step motor applications.

\*\*Consult Factory for Availability.

# MDrive34Plus MOTION CONTROL

## STANDARD SPECIFICATIONS (Plus Versions)

INPUT VOLTAGE (+V)	Range	+12 to +75 VDC Power supply current requirements = 4A (maximum) per MDrive34Plus. Actual power supply current will depend on voltage and load.		
	AUX. LOGIC INPUT VOLTAGE	Range	+12 to +24 VDC Maintains power to control and feedback circuits (only) when input voltage is removed.	
ANALOG INPUT	Resolution	10 Bit		
	Voltage Range	0 to +5 VDC, 0 to +10 VDC, 0-20 mA, 4-20 mA		
GENERAL PURPOSE I/O	Number/Type	4 Sinking Outputs/4 Sourcing or Sinking Inputs		
	Logic Range	Inputs and Outputs Tolerant to +24VDC, Inputs TTL Level Compatible		
	Output Sink Current	Up to 600 mA per Channel		
	Protection	Over Temp, Short Circuit, Transient Over Voltage, Over Voltage, Inductive Clamp		
COMMUNICATION	Type (Standard)	RS-422/485		
	Baud Rate	4.8 to 115.2kbps		
	Type (Optional)	CANopen DSP-402 (V2.0), DS-301 (V3.0), 2.0B Active		
	ID	11 and/or 29 Bit		
	Isolation	Galvanic		
	Features	Node Guarding, Heartbeat, SD0s, PDOs (Variable Mapping)		
MOTION	Open Loop Configuration	Number of Settings	20	
		Steps Per Revolution	200, 400, 800, 1000, 1600, 2000, 3200, 5000, 6400, 10000, 12800, 20000, 25000, 25600, 40000, 50000, 51200, 36000 (0.01 deg/μstep), 21600 (1 arc minute/μstep), 25400 (0.001mm/μstep)	
	Closed Loop Configuration (Optional)	Internal Encoder	Type	Internal, Optical
			Steps Per Revolution	51200
			Resolution	512 Lines/2048 Edges Per Rev
	Counters	Type	Position, Encoder/32 Bit	
		Edge Rate (Max)	5 MHz	
	Velocity	Range	+/- 5,000,000 Steps Per Second	
		Resolution	0.5961 Steps Per Second	
	Accel/Decel	Range	1.5 x 10 <sup>9</sup> Steps Per Second <sup>2</sup>	
Resolution		90.9 Steps Per Second <sup>2</sup>		
SOFTWARE	Program Storage	Type/Size	Flash/6384 Bytes	
	User Registers	(4) 32 Bit		
	User Program Labels and Variables	192		
	Math Functions	+, -, x, ÷, >, <, =, <=, >=, AND, OR, XOR, NOT		
	Branch Functions	Branch & Call		
	General Purpose I/O Functions	Inputs	Home, Limit Plus, Limit Minus, Go, Stop, Pause, Jog Plus, Jog Minus, General Purpose	
		Outputs	Moving, Fault, Stall, Velocity Change, General Purpose	
	Trip Functions	Trip on Input, Trip on Position, Trip on Time, Trip Capture, Trip on Relative Position		
	Party Mode Addresses	62		
	Encoder Functions	Stall Detection, Position Maintenance, Find Index		
THERMAL	Operating Temperature	Heat Sink	-40° to +75°C (non-condensing)	
		Motor	-40° to +90°C (non-condensing)	

## EXPANDED SPECIFICATIONS (Plus<sup>2</sup> Versions)


GENERAL PURPOSE I/O	Number/Type	8 Sourcing or Sinking Outputs/Inputs			
	Logic Range	Sourcing Outputs +12 to +24 VDC, Inputs and Sinking Outputs Tolerant to +24 VDC, Inputs TTL Level Compatible			
	Output Sink/Source Current	Up to 600 mA per Channel			
MOTION	Electronic Gearing	Range <sup>‡</sup> /Resolution/Threshold (External Clock In)	0.001 to 2.000/32 Bit/TTL		
		Input Filter Range	50 nS to 12.9 μS (10 MHz to 38.8 kHz)		
		Range <sup>‡</sup> (Secondary Clock Out)	1 to 1		
	High Speed I/O	Position Capture	Input Filter Range	50 nS to 12.9 μS (10 MHz to 38.8 kHz)	
			Resolution	32 Bit	
		Trip Output – Speed/Resolution/Threshold	150 nS/32 Bit/TTL		
	Closed Loop Configuration (Optional)	Remote Encoder	Type	User-Supplied Differential Encoder	
			Steps Per Revolution	See "Standard Specs Open Loop Steps/Rev" Above	
Resolution			User-Defined Note: μstep/rev 2X the encoder count/rev minimum		

<sup>‡</sup> Adjusting the microstep resolution can increase the range.

## MOTOR SPECIFICATIONS

	Holding Torque	Detent Torque	Rotor Inertia	Weight (Motor+Driver)
SINGLE LENGTH	381 oz-in / 269 N-cm	10.9 oz-in / 7.7 N-cm	0.01416 oz-in-sec <sup>2</sup> / 1.0 kg-cm <sup>2</sup>	4.1 lb / 1.9 kg
DOUBLE LENGTH	575 oz-in / 406 N-cm	14.16 oz-in / 10.0 N-cm	0.02266 oz-in-sec <sup>2</sup> / 1.6 kg-cm <sup>2</sup>	5.5 lb / 2.5 kg
TRIPLE LENGTH	1061 oz-in / 749 N-cm	19.83 oz-in / 14.0 N-cm	0.04815 oz-in-sec <sup>2</sup> / 3.4 kg-cm <sup>2</sup>	8.8 lb / 4.0 kg

## MOTOR PERFORMANCE — Speed-Torque

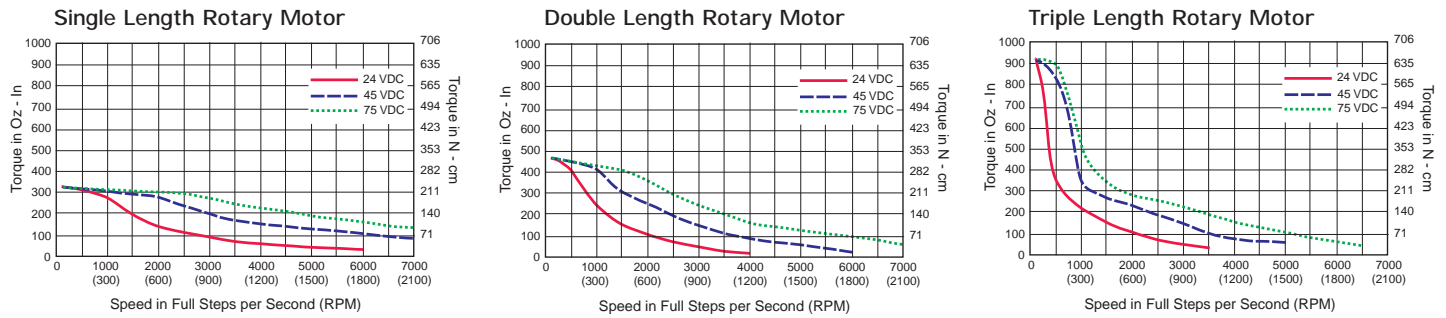

## WIRE/PIN ASSIGNMENTS — MDrive34Plus Motion Control

### Plus

P1: I/O & POWER CONNECTOR		
Flying Leads Wire Colors	Function	
White/Yellow	I/O 1	
White/Orange	I/O 2	
White/Violet	I/O 3	
White/Blue	I/O 4	
Green	Analog Input	
Black	Power/Aux Ground	
Red	+V (+12 to +75 VDC)	

P2: COMM CONNECTOR		
RS-422/485		
10-Pin IDC	Wire Crimp	Function
Pin 1	Pin 9	TX +
Pin 2	Pin 10	TX -
Pin 3	Pin 7	RX +
Pin 4	Pin 8	RX -
Pin 5	Pin 5	Aux-Logic (+12 to +24 VDC)
Pin 6	Pin 6	RX +
Pin 7	Pin 3	RX -
Pin 8	Pin 4	TX -
Pin 9	Pin 1	TX +
Pin 10	Pin 2	Comm Ground

### Plus2

P1: I/O CONNECTOR		
Wire Crimp	Function	
	Expanded I/O	Remote Encoder Closed Loop Control
Pin 1	I/O Power	I/O Power
Pin 2	I/O Ground	I/O Ground
Pin 3	I/O 1	I/O 1
Pin 4	I/O 2	I/O 2
Pin 5	I/O 3	I/O 3
Pin 6	I/O 4	I/O 4
Pin 7	I/O 9	I/O 9
Pin 8	I/O 10	I/O 10
Pin 9	I/O 11	I/O 11
Pin 10	I/O 12	I/O 12
Pin 11	Capture/Trip I/O	Capture/Trip I/O
Pin 12	Analog In	Analog In
Pin 13	Step/Clock I/O	Step/Clock I/O
Pin 14	Direction/Clock I/O	Direction/Clock I/O
Pin 15	not applicable	Channel A +
Pin 16		Channel A -
Pin 17		Channel B +
Pin 18		Channel B -
Pin 19		Index +
Pin 20		Index -


P2: COMM CONNECTOR			
RS-422/485		CANopen	
Wire Crimp	Function	DB9 (Male)	Function
Pin 1	TX +	Pin 1	No Connect
Pin 2	Comm Ground	Pin 2	CAN Low
Pin 3	RX -	Pin 3	CAN -V
Pin 4	TX -	Pin 4	Aux Power
Pin 5	Aux-Logic (+12 to +24 VDC)	Pin 5	Shield
Pin 6	RX +	Pin 6	CAN -V
Pin 7	RX +	Pin 7	CAN High
Pin 8	RX -	Pin 8	No Connect
Pin 9	TX +	Pin 9	CAN +V
Pin 10	TX -		

P3: POWER CONNECTOR	
Wire Crimp	Function
Pin 1	+V (+12 to +75 VDC)
Pin 2	Power/Aux Ground

# MECHANICAL SPECIFICATIONS

Dimensions in Inches (mm)

## MDrive34Plus Motion Control

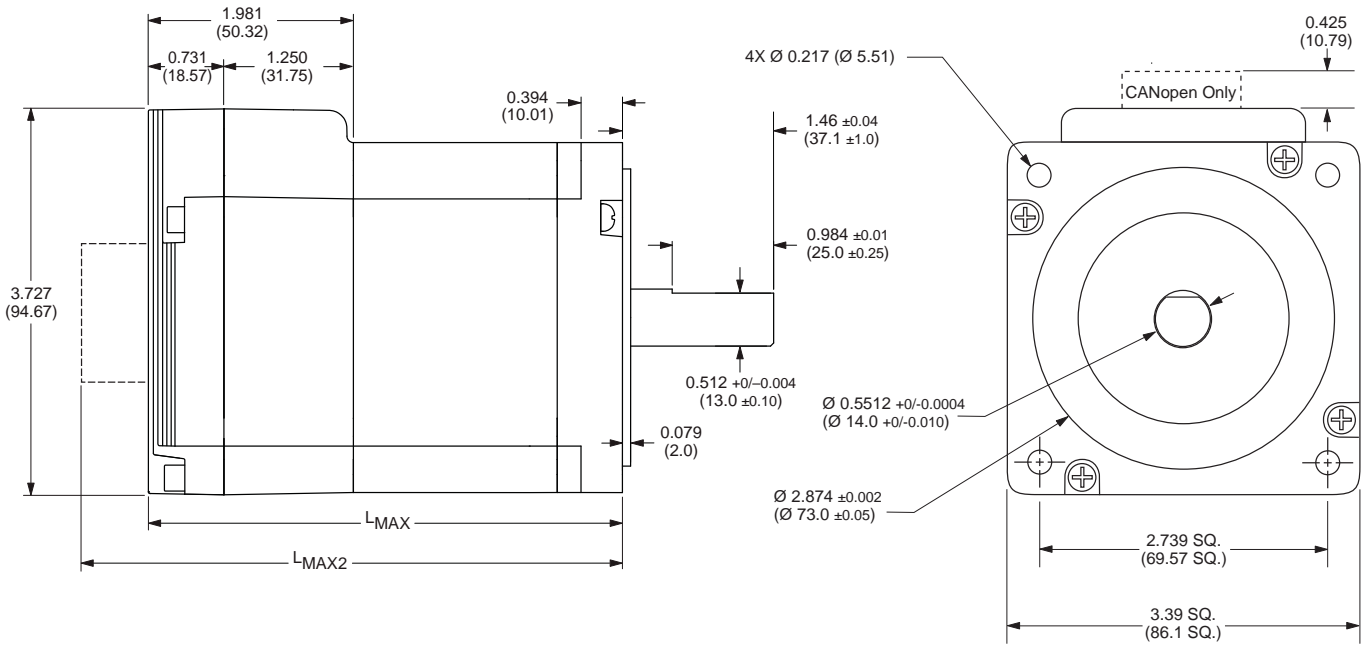



MDrive Lengths Inches (mm)

	L <sub>MAX</sub> SINGLE SHAFT, INTERNAL ENCODER or LINEAR ACTUATOR VERSION	L <sub>MAX2</sub> CONTROL KNOB VERSION
Motor Length		
Single	3.81 (96.77)	4.52 (114.81)
Double	4.60 (116.84)	5.31 (134.87)
Triple	6.17 (156.72)	6.88 (174.75)

L<sub>MAX2</sub> Option



Connector Options

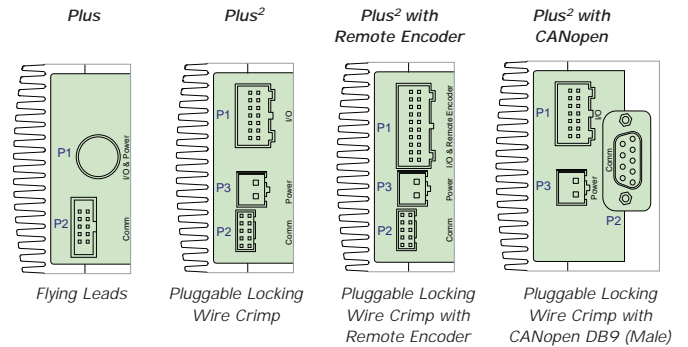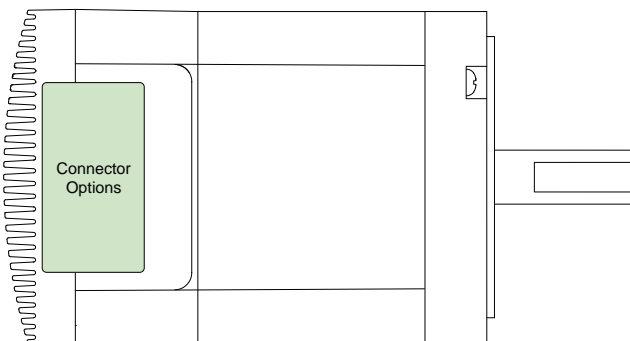

Connectivity details:  
[www.imshome.com/cables\\_cordsets.html](http://www.imshome.com/cables_cordsets.html)

CONNECTIVITY

**new** QuickStart Kit  
For rapid design verification, all-inclusive QuickStart Kits have communication converter, prototype development cable(s), instructions and CD for MDrivePlus initial functional setup and system testing.

**new** Communication Converters  
Electrically isolated, in-line converters pre-wired with mating connectors to conveniently set/program communication parameters for a single MDrivePlus via a PC's USB port. Length 12.0' (3.6m).  
*Mates to connector:*  
10-Pin IDC ..... MD-CC400-001  
10-Pin Wire Crimp ..... MD-CC402-001  
DB9 CANopen ..... MD-CC500-000\*  
\*Requires mating connector adapter and power supply, not supplied.

Prototype Development Cables  
Speed test/development with pre-wired mating connectors that have flying leads other end. Length 10.0' (3.0m).  
*Mates to connector:*  
10-Pin Wire Crimp ..... PD10-1434-FL3  
14-Pin Wire Crimp ..... PD14-2334-FL3  
20-Pin Wire Crimp ..... PD20-3400-FL3  
2-Pin Wire Crimp ..... PD02-3400-FL3

**new** Mating Connector Kits  
Use to build your own cables. Kits contain 5 mating shells with pins. Cable not supplied. Manufacturer's crimp tool recommended.  
*Mates to connector:*  
10-Pin Wire Crimp ..... CK-02  
14-Pin Wire Crimp ..... CK-09  
20-Pin Wire Crimp ..... CK-11  
2-Pin Wire Crimp ..... CK-05  
Kit contains 5 mating connectors that press fit onto ribbon cable. Cable not supplied.  
10-Pin IDC ..... CK-01

OPTIONS

**Linear Actuator\*\***  
The MDrive34Plus is offered with numerous linear actuator styles and options to satisfy a broad range of linear motion applications. Contact the factory for details or see: [www.imshome.com/mdriveplus\\_linear\\_actuator.html](http://www.imshome.com/mdriveplus_linear_actuator.html)

**Internal Encoder**  
All MDrive34Plus Motion Control versions are available with an optional internal 512-line (2048 count) optical encoder with index mark.

**Remote Encoder (Plus<sup>2</sup> versions only)**  
MDrive34Plus<sup>2</sup> Motion Control versions are available with differential encoder inputs for use with a remote encoder (not supplied).

**Control Knob**  
The MDrive34Plus Motion Control is available with a factory-mounted rear control knob for manual shaft positioning.

**Planetary Gearbox**  
Efficient, low maintenance planetary gearboxes are offered assembled with the MDrive34Plus. Refer to details and part numbers on the back cover.

\*\* Consult Factory for Availability.

Connectivity details: [www.imshome.com/cables\\_cordsets.html](http://www.imshome.com/cables_cordsets.html)

PART NUMBERING

**Plus** flying leads interface

**K MDI1F** [ ] [ ] **34** [ ] **7** - [ ] **OPTION**

*QuickStart Kit details above*

**P1: I/O & Power**  
12" Flying Leads

**P2: Communications**  
RD = RS-422/485 with 10-Pin IDC Connector  
RL = RS-422/485 with 10-Pin Friction Lock Wire Crimp

**Motor**  
A = Single Length & Linear Actuator\*\*  
B = Double Length  
C = Triple Length

**Example #1:** Part Number **MDI1FRD34A7** is an MDrive34Plus Motion Control with 12" flying leads I/O & power interface, RS-422/485 communications with 10-pin IDC connector, and NEMA 34 single length motor.

**Plus<sup>2</sup>** pluggable interface

**K MDI3C** [ ] [ ] **34** [ ] **7** - [ ] **OPTION**

*QuickStart Kit details above*

**P1: I/O**  
14-Pin Locking Wire Crimp (20-Pin with Remote Encoder)

**P3: Power**  
2-Pin Locking Wire Crimp

**P2: Communications**  
RL = RS-422/485 with 10-Pin Friction Lock Wire Crimp  
CB = CANopen with DB9 Connector

**Motor**  
A = Single Length & Linear Actuator\*\*  
B = Double Length  
C = Triple Length

**Example #2:** Part Number **MDI3CRL34A7** is an MDrive34Plus<sup>2</sup> Motion Control with 14-pin I/O interface, 2-pin power interface, RS-422/485 communications with 10-pin friction lock wire crimp connector, and NEMA 34 single length motor.

\*\*Consult Factory for Availability.

OPTIONS

**Linear Actuator\*\*** -L  
For complete product specifications, see: [www.imshome.com/mdriveplus\\_linear\\_actuator.html](http://www.imshome.com/mdriveplus_linear_actuator.html)

**Internal Encoder** -EQ  
Example: **MDI1FRD34A7-EQ** adds a 512-line internal optical encoder with index mark to example #1.

**Remote Encoder** -EE  
Example: **MDI3CRL34A7-EE** adds differential encoder inputs for use with remote encoder (not supplied) to example #2, increasing the wire crimp connector from 14-pins to 20-pins. Available with Plus<sup>2</sup> versions only. May not be combined with internal encoder option.

**Control Knob** -N  
Example: **MDI3CRL34A7-N** adds a rear control knob for manual positioning to example #2.

**Planetary Gearbox** -G [ ] [ ] [ ] -F  
Refer to gearbox page for complete table of ratios and part numbers. **Optional NEMA Flange**  
Example: **MDI3CRL34A7-G1A2** adds a 1-stage planetary gearbox with 5.18:1 ratio to example #2. Add -F for optional NEMA flange.

## MDRIVE34PLUS WITH PLANETARY GEARBOX

The MDrive34Plus is available with a Planetary Gearbox option developed to increase torque at lower speeds, enable better inertia matching and produce finer positional resolutions. These efficient, low maintenance Planetary Gearbox come fully assembled with the MDrive and are offered in a large number of reduction ratios in 1-, 2- and 3-stage configurations. An optional NEMA Output Flange allows mounting the Planetary Gearbox to the load using a standard NEMA bolt circle. Planetary Gearbox may be combined with other MDrive34Plus options, however are unavailable with Linear Actuators.

### Planetary Gearbox Parameters


	Permitted Output Torque (oz-in/Nm)	Gearbox Efficiency	Maximum Backlash	Output Side with Ball Bearing			
				Maximum Load (lb-force/N)		Weight (oz/g)	
				Radial	Axial	Gearbox	with Flange
<b>1-STAGE</b>	2832/20.0	0.80	1.0°	90/400	18/80	64.4/1827	66.7/1890
<b>2-STAGE</b>	8496/60.0	0.75	1.5°	135/600	27/120	89.5/2538	92.6/2625
<b>3-STAGE</b>	16992/120.0	0.70	2.0°	225/1000	45/200	114.6/3248	118.5/3360

### Ratios and Part Numbers

Planetary Gearbox	Ratio (Rounded)	Part Number**
1-Stage	3.71:1	G1A1
1-Stage	5.18:1	G1A2
1-Stage	6.75:1	G1A3
2-Stage	13.73:1	G1A4
2-Stage	15.88:1	G1A5
2-Stage	18.37:1	G1A6
2-Stage	19.20:1	G1A7
2-Stage	22.21:1	G1A8
2-Stage	25.01:1	G1A9
2-Stage	26.85:1	G1B1
2-Stage	28.93:1	G1B2
2-Stage	34.98:1	G1B3
2-Stage	45.56:1	G1B4
3-Stage	50.89:1	G1B5
3-Stage	58.86:1	G1B6
3-Stage	68.07:1	G1B7
3-Stage	71.16:1	G1B8
3-Stage	78.72:1	G1B9
3-Stage	92.70:1	G1C1
3-Stage	95.18:1	G1C2
3-Stage	99.51:1	G1C3
3-Stage	107.21:1	G1C4
3-Stage	115.08:1	G1C5
3-Stage	123.98:1	G1C6
3-Stage	129.62:1	G1C7
3-Stage	139.14:1	G1C8
3-Stage	149.90:1	G1C9
3-Stage	168.85:1	G1D1
3-Stage	181.25:1	G1D2
3-Stage	195.27:1	G1D3
3-Stage	236.10:1	G1D4
3-Stage	307.55:1	G1D5

### Planetary Gearbox for MDrive34Plus

Dimensions in Inches (mm)

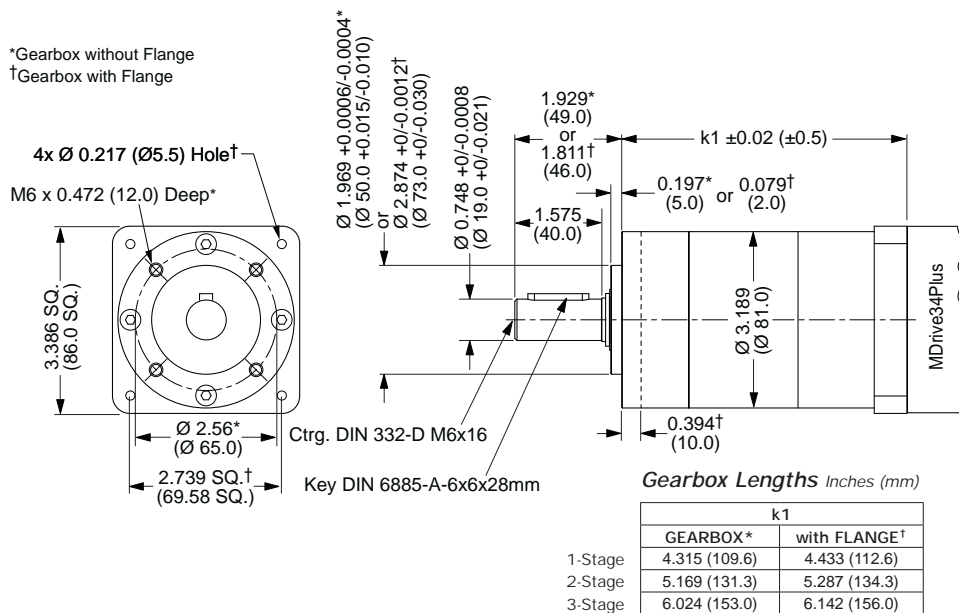

\*\*Include optional planetary gearbox by adding -G plus 3 characters to the end of an MDrive part number.

#### U.S.A. SALES OFFICES

**Eastern Region**  
Tel. 862 208-9742 - Fax 973 661-1275  
e-mail: jroake@imshome.com

**Central Region**  
Tel. 260 402-6016 - Fax 419 858-0375  
e-mail: dwaksman@imshome.com

**Western Region**  
Tel. 602 578-7201  
e-mail: dweisenberger@imshome.com

#### IMS ASIA PACIFIC OFFICE

30 Raffles Pl., 23-00 Chevron House, Singapore 048622  
Tel. +65/6233/6846 - Fax +65/6233/5044  
e-mail: wllee@imshome.com

#### IMS EUROPEAN SALES MANAGEMENT

4 Quai Des Etroits  
69005 Lyon, France  
Tel. +33/4 7256 5113 - Fax +33/4 7838 1537  
e-mail: bmartinez@imshome.com

#### IMS UK Sales

Machine Technology Centre, Blackhill Drive  
Wolverton, Milton Keynes MK12 5TS  
Tel. +44/0 1908 628000 - Fax +44/0 1908 628001  
e-mail: mcheckley@imshome.com

#### TECHNICAL SUPPORT

Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107  
e-mail: etech@imshome.com

#### Intelligent Motion Systems, Inc.

370 North Main Street, P.O. Box 457  
Marlborough, CT 06447 - U.S.A.  
Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107  
e-mail: info@imshome.com  
http://www.imshome.com